


Date _____
 Dealer _____
 Customer _____
 Design Pressure of Opening _____
 Sheet Number ____ of ____
 Number of Identical Units _____


Instructions

1. Show all dimensions in inches.
2. Unless identical, make a separate sheet for each opening.


Width Dimension

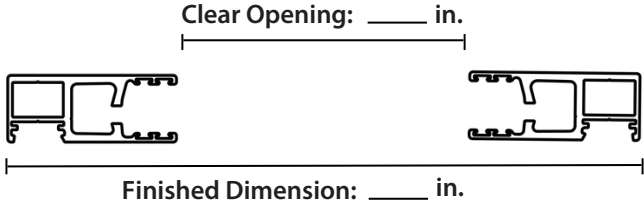


Height Dimension

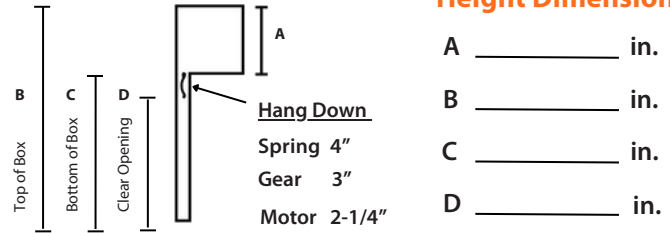


Side Rail Type

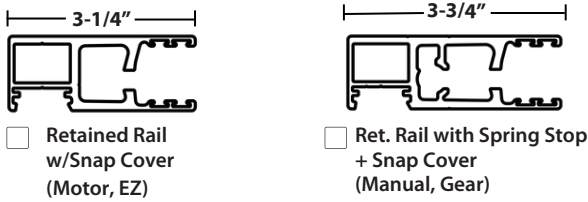


Box Housing + Slat Style

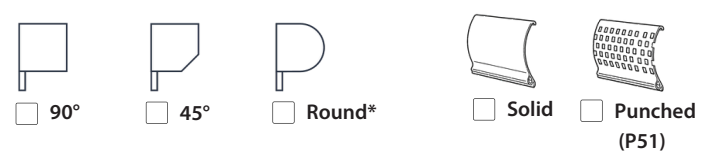

Rail Drilling Style

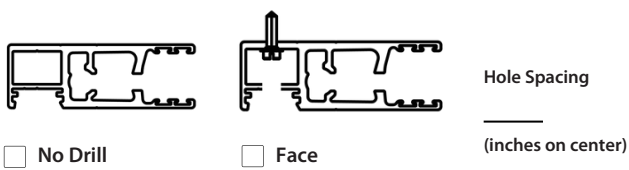

Operator

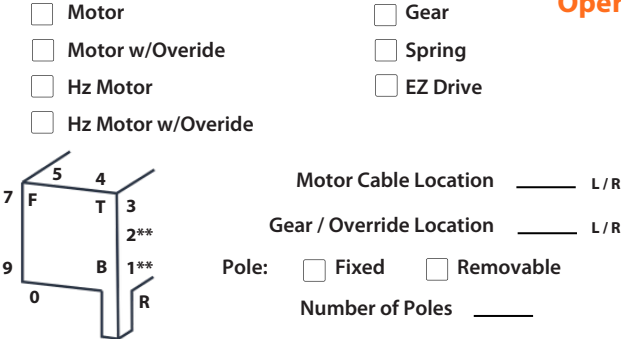

Fastener Size (Approved Type Only)

1/4" 5/16" 3/8" other _____

(Click here for details) https://floridabuilding.org/upload/PR_Instl_Docs/FL39156_R2_II__DWG.pdf

Additional Requirements

- Designer Cover (Motor)
- Designer Wall Switch (Motor)
- DecoFlex 1 Channel Wall Switch (Hz)
- DecoFlex 5 Channel Wall Switch (Hz)
- Somfy 1 Channel Remote (Hz)
- Somfy 5 Channel Remote (Hz)
- Telis 16 Channel RTS Remote
- TaHoma Hub
- Universal RTS Interface II (URTSI II)
- RTS receiver: IGC 4 in 1
- RTS switch: Smoove 4 Channel
- GCS II

Housing*** Rails Slats Base Slat Colors

	Housing***	Rails	Slats	Base Slat	Colors
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	White
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Ivory
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Beige
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Gray
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Bronze
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Clr Anodized
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Blk Anodized

Lock Location + Type

- Lock-C (Door-Mid Curtain)
 - Lock-C (Window-Low Curtain)
 - Slide Lock (BS)
 - Thumbturn (BS)
- Centered
 _____ From Left Right

Box Housing Sizes (REF Shutter Height)

	Motor (Top of Box)	Manual (Lock Slat [LS] or Finger Pull [FP] in curtain) (Top of Box)	Door (D) (REF)
10"	207"	201" (W)	FP+LS: 11-12 UP LS (30-36") 7 UP FP (20-24")
8"	144"	120" (D)	Window (W) (REF)
7"	112"	96" (D)	FP+LS: 3-4 UP FP (12-16") 1-2 UP LS (6-10")
6.5"	N/A	N/A	
6"	75"	52" (W)	

*Not available in 10"
 **Not available on Large Shutters w/Required Reinforcement (>36 sq.ft.gear, >65 sq.ft. motor)
 ***RND: 6" white; 7" white/gray; 8" white/beige/gray